

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
 6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
 WO 2004/038480 A1

(51) International Patent Classification⁷: G02B 15/00, 3/14

Rudolph, M. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). OPHEY, Willem, G. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number:
 PCT/IB2003/004595

(74) Agent: COBBEN, Louis, M., H.; Philips Intellectual Property & Standards, c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date: 17 October 2003 (17.10.2003)


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English
 (26) Publication Language: English
 (30) Priority Data:
 02079473.1 25 October 2002 (25.10.2002) EP

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ZOOM LENS

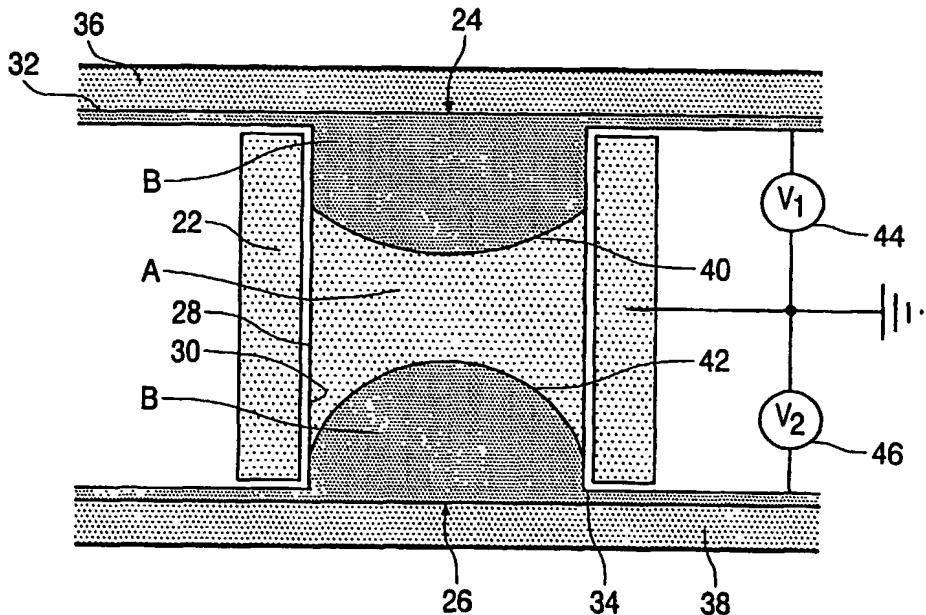

(57) **Abstract:** A zoom lens comprising, from the object side to the image side, a front lens group (72), a controllable lens group, and a rear lens group (74), the controllable lens group comprising a voltage-controlled electrowetting device, which device contains a first fluid (A) and a second fluid (B) having different refractive indices, with at least two first fluid-second fluid interfaces (40,42). The curvatures, and thus the lens power, of these interfaces can be changed independently by supplying a voltage (V1, V2) to electrodes (22,32) of the device, so that no mechanical movement of lens elements is needed.

WO 2004/038480 A1